



EJE EN POSICION
SHAFT SHOWN IN POSITION 0


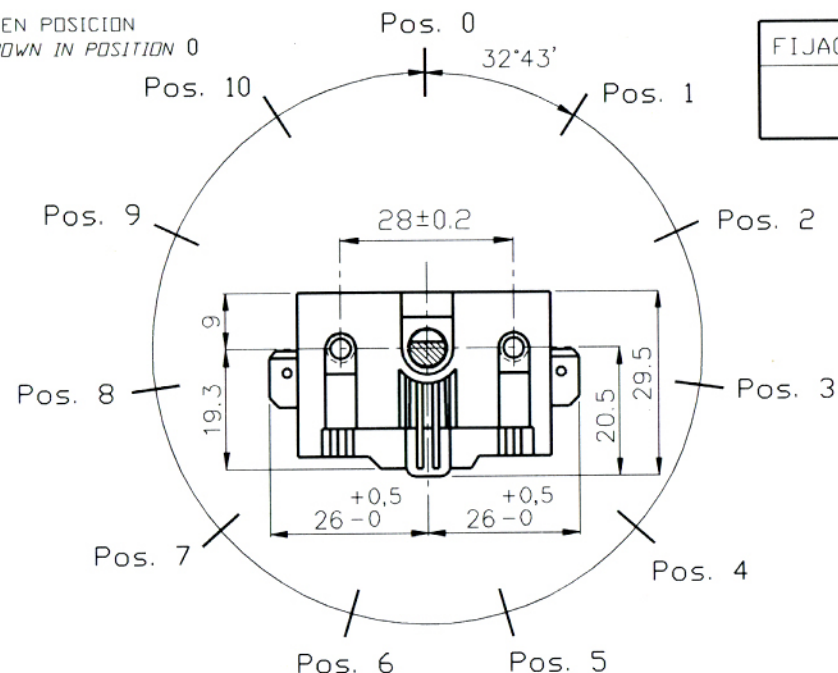


FIJACION/FIXING

M4

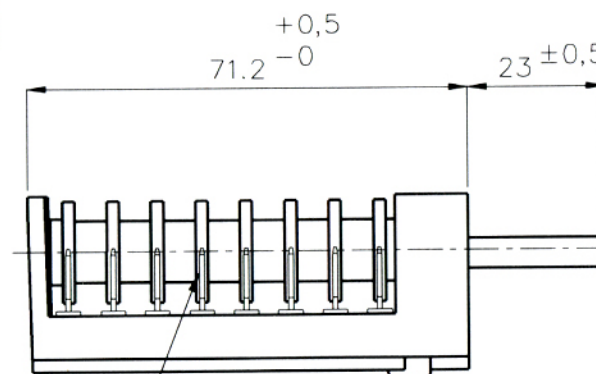

FASTON 6.3 x 0.8

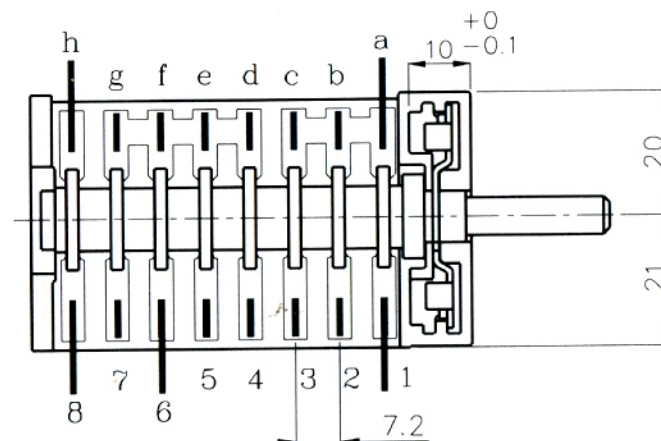

SECUENCIA CONEXIONES SWITCHING SCHEME											
POSICIONES POSITIONS	0	1	2	3	4	5	6	7	8	9	10
CIRCUITOS CONTACTS											
a ①		●	●	●	●	●	●	●	●	●	●
b ②					●	●	●	●	●	●	●
c ③								●	●	●	●
d ④									●	●	●
e ⑤			●		●		●	●	●	●	●
f ⑥			●	●					●	●	●
g ⑦						●	●	●	●	●	●
h ⑧		●	●	●	●	●	●	●	●	●	●

VALORES DE HOMOLOGACION
LISTED VALUES



16(4)A 250V ~

10(2)A 400V ~

TEMPERATURA: 150 ° C
TEMPERATURE:

PAR DE GIRO SUAVE

Component conforming
to the European Directive
2002/95/EC RoHS

DIBUJADO: B. Atanet F: 24-3-11

SERIE:

SAMPLE REF:

CLIENT: ITALRES

CLIENT REF: 41.48023.007

Ref. Leva: 1788272

Ref. CAD: 81086

DO NOT SCALE DRAWING